## Genius XE Nitrogen

High performance nitrogen generator for LC-MS



Your local gas generation partner

## Description


Inspired by the success of our best-selling Genius line of nitrogen gas generators for LC-MS, Genius XE Nitrogen is a cutting-edge evolution combining advanced technology with refined and robust engineering. With two models - XE 35 (up to 35 L/min) and XE 70 (up to 70 L/min) - Genius XE Nitrogen provides a premium standalone nitrogen solution for high performance LC-MS and other mission-critical laboratory applications where performance and reliability are paramount.

Featuring **Multi-Stage Purification**™ and next-generation integrated compressors with **Electronic Compressor Optimization**™ (ECO) technology, Genius XE delivers factory certifiable purity up to 99.5% on-demand, 24/7 with a convenient fixed annual service interval.



On-demand nitrogen source for:

- LC-MS including new high-sensitivity instruments
- ELSD
- Small sample evaporators
- Other laboratory applications requiring nitrogen

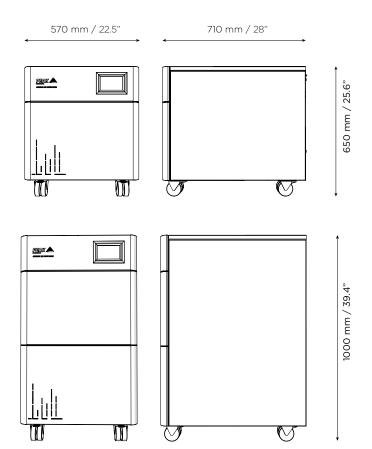



## **Key Features**

- Variable flow up to 70 LPM
- Variable pressure up to 116 psi
- Multi-Stage Purification™ producing analytical grade nitrogen gas up to 99.5% purity
- 2 year comprehensive manufacturer's warranty\*
- Touch-screen full colour user interface for ease of operation
- ECO (Electronic Compressor Optimisation™) technology for low energy consumption and compressor durability
- Next-generation high performance premium compressors, engineered exclusively for Genius XE
- Smaller & quieter than previous generation of Genius
- On-board service scheduling and system diagnostics
- Redundancy (Genius XE 70 only)

| <b>Technical Specifications</b>  | Genius XE 35                             | Genius XE 70                              |
|----------------------------------|--|---|
| Max Flow Rate                    | up to 35 L/min                           | up to 70 L/min                            |
| Max Pressure                     | 116 psi (8 bar)                          | 116 psi (8 bar)                           |
| Gas Outlets                      | 1 x 1/4" BSPP                            | 1 x 1/4" BSPP                             |
| Purity**                         | 95-99.5%                                 | 95-99.5%                                  |
| Max Relative Humidity            | 80% RH @ 31°C                            | 80% RH @ 31°C                             |
| Max Altitude                     | 2000m                                    | 2000m                                     |
| Particles                        | < 0.01 µm                                | < 0.01 µm                                 |
| Phthalates                       | Phthalate & BHT Free                     | Phthalate & BHT Free                      |
| Suspended Liquids                | None                                     | None                                      |
| Non-Methane Hydrocarbon Content  | < 1 ppm NMHC                             | < 1 ppm NMHC                              |
| Operating Temperature            | 15°C (59°F) to 35°C (95°F)               | 15°C (59°F) to 35°C (95°F)                |
| Electrical Requirements          | 120VAC, 60Hz, 12A or 230VAC, 50/60Hz, 8A | 230VAC, 50/60Hz, 11.3A                    |
| Power Consumption                | 960 VA (120V)/1265 VA (230V)             | 2530 VA                                   |
| Heat Output                      | 4118 BTU                                 | 8785 BTU                                  |
| Noise Level <sup>†</sup>         | 56 dB                                    | 59 dB                                     |
| Generator Dimensions (H x W x D) | 650 x 570 x 710 mm<br>25.6 x 22.5 x 28 " | 1000 x 570 x 710 mm<br>39.4 x 22.5 x 28 " |
| Generator Weight                 | 92 kg / 202 lbs                          | 147 kg / 325 lbs                          |

| Ordering Information      |  |         |
|---------------------------|--|---------|
| Part Number               | 3300252 (230VAC) /3300807 (120VAC)     | 3300253 |
| Annual Service            | visit: www.peakscientific.com/ordering |         |
| Complete Maintenance Plan |  |         |

<sup>\*\*</sup> Factory certified purity with respect to 02 content. Actual purity varies in relation to flow (min. 95% at maximum flow output)

## **PEAK** Protected <sup>™</sup>

Peak Scientific gas generators define the benchmark in reliability, convenience and performance in laboratories around the world, and come backed by a 2 year warranty\*. Beyond this period however you can ensure that your investment continues to be [Protected] by our comprehensive generator care cover.

Our world-class aftercare support packages deliver a program of scheduled preventative maintenance whilst giving you the reassurance of instant access to worldwide technical support and priority on-site response in the untimely event of a breakdown.

\*Year 2 of warranty subject to generator being serviced at end of year 1 by a Peak-approved agent in accordance with fixed annual maintenance schedule. For full terms and conditions visit www.peakscientific.com/warranty-statement

Peak Scientific UK Tel: +44 (0)141 812 8100 Fax: +44 (0)141 812 8200

Peak Scientific North America

Tel: +1 866 647 1649 Fax: +1 978 608 9503

For a full list of our worldwide office locations, please visit: www.peakscientific.com/offices

Web: www.peakscientific.com Email: discover@peakscientific.com Peak Scientific's Quality Management System conforms to: ISO 9001:2015













**Product Certifications** 



<sup>&</sup>lt;sup>†</sup> Noise level expressed as SPL (Sound Pressure Level) measured at 1m from source in a reverberant chamber